

Doors

DB-15

At Panelship, we have designed the DB-15 door while taking care of the smallest details in its manufacturing process and this allows us to provide our clients with a top-quality door. The DB-15 door is supplied complete and ready for fast installation, including: frame, counter-frame, metal fittings and all types of accessories for correct installation and operation.




DB-15

Fire classification	B-15
Integrity	30 min. [test. Shut-down]
Leaf door	PVC covering Painted or stainless steel
Frame door	Painted or stainless steel
Leaf thickness	36 mm
Acoustic insulation	32 dB
Insulation material	Mineral rock wool
Stainless steel hinges	3
Weight [1900x800]	55 kg



Assembly instructions

- 1 The cavity is opened in the panel, with the defined exterior frame measurements + 10 mm.
- 2 The counter-frame is installed clamped to the partition panel and the frame is fitted with the cavity previously opened, and screwing the frame to the counter-frame.
- 3 It is recommended that a "U" reinforcement piece be fitted inside the panel.

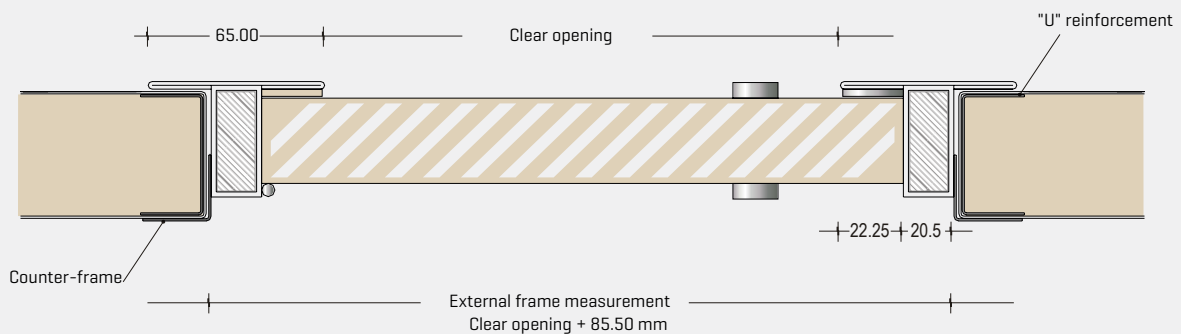

External frame measurement= Clear opening + 86 mm
 Cavity to be opened in the panel= external frame measurement + 10 mm

